

Attack Hose - FAS


Single Jacket, EPDM Rubber Liner

★ Features

- Single jacket made from 100% high tensile strength Polyester yarns provides good resistance to abrasion, oxidation and UV
- Optional innovative Wisentec™ coating of NFPA colors provides mildew protection and increases resistance to abrasion, heat, flame and petro-chemical
- Remain flexible at the temperature as low as -40°F / -40°C
- Applicable to Brass/Alu NST/NPSH threaded couplings, other type on request
- Standard length 50', 100', 200', other length on request
- TPU lining is also available which provides lowest friction loss and is less-weighted



🏠 Construction

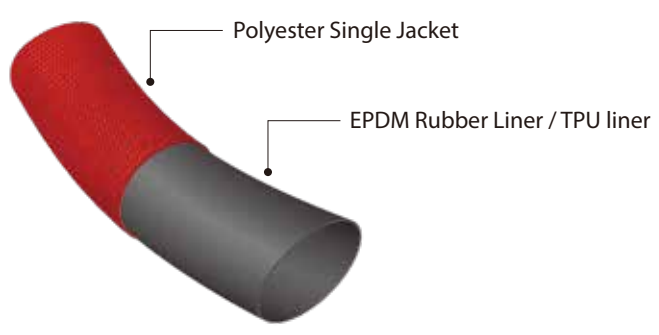

🛡️ Standard

- FM 2111 and UL 19 approved
- Meets or exceeds NFPA 1961
- Within ISO-9001 quality management system

📊 Technical Data

Nominal Size		Working Pressure		Test Pressure		Burst Pressure		Certification
inch	mm	psi	bar	psi	bar	psi	bar	
1-1/2"	38	250, 300	17, 21	500, 600	34, 42	750, 900	51, 63	FM APPROVED
1-3/4"	45	250, 300	17, 21	500, 600	34, 42	750, 900	51, 63	
2"	52	250, 300	17, 21	500, 600	34, 42	750, 900	51, 63	
2-1/2"	65	250, 300	17, 21	500, 600	34, 42	750, 900	51, 63	
Nominal Size		Working Pressure		Test Pressure		Burst Pressure		Certification
inch	mm	psi	bar	psi	bar	psi	bar	
1-1/2"	38	150, 200	10, 14	300, 400	20, 28	450, 600	30, 42	
2-1/2"	65	200, 250	14, 17	400, 500	28, 34	600, 750	42, 51	